



SERVING THE FOOD INDUSTRY SINCE 1951

## Display Refrigerators, Glass Doors, White

ITEM:	50032	52032	50033	50035	50036	50052
MODEL:	RE-CN-0045-HC	RE-CN-0045-HC-SW	RE-CN-0009-HC	RE-CN-0014-H	RE-CN-0023-HC	RE-CN-0052-HC



78" Wide  
50052

54" Wide  
50032  
(Sliding Doors)

54" Wide  
52032



28" Wide  
50036

26" Wide  
50035

22" Wide  
50033



### Attractively display your products and increase impulse sales.

The Aurora glass door refrigerator enhances product visibility while offering ample, customizable storage with adjustable shelves—ideal for supermarkets, cafés, and delis. Its eco-friendly R290 system with a bottom-mounted compressor ensures efficient cooling and easier access to lower shelves. A digital LCD controller allows precise temperature monitoring, and automatic defrost prevents ice buildup, combining style, performance, and convenience for any business.

- Adjustable shelves
- Powerful, environmentally safe refrigeration system
- Bottom mounted compressor for energy efficiency
- Digital Temperature Control & LCD display
- Auto-defrost System

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



Authorized Dealer



\*50052

Made in China

Updated:  
May 4, 2026 10:16 AM

js Page 1 / 5

<b>TECHNICAL SPECIFICATION (1 Door Models)</b>			
Features	<b>22" wide / 9.1 cu. ft.</b>	<b>26" wide/ 14 cu. ft.</b>	<b>28" wide / 23 cu. ft.</b>
Item	50033	50035	50036
Model	RE-CN-0009-HC	RE-CN-0014-H	RE-CN-0023-HC
Capacity	9.1 cu. ft. (257L)	14 cu. ft. (396 L)	23 cu. ft. (651 L)
Number of Doors	1 Swing Glass Door	1 Swing Glass Door	1 Swing Glass Door
Self-Closing Door	Yes	Yes	Yes
Material	Exterior: Painted Steel	Interior & Exterior: Stainless steel with aluminum back	Interior & Exterior: Stainless steel with aluminum back
Number of Shelves	4	4	4
Shelf Capacity	55.1 lb (25 kg)	77 lb (35 kg)	90 lb (41 kg)
Shelf Material	Plastic Coated	Plastic Coated	Plastic Coated
Number of Casters	4	None	None
Power	1/5 HP	1/5 HP	1/5 HP
Current	2.9A	2.88 A	3 A
Electrical	110-120V / 60Hz / 1Ph	110-120V / 60Hz / 1Ph	110-120V / 60Hz / 1Ph
Temperature Controller	Digital	Digital	Digital
Temperature Range	0.5°C - 5°C (33°F - 41°F)	0.5°C - 5°C (33°F - 41°F)	0.5°C - 5°C (33°F - 41°F)
Refrigerant	R290	R290	R290
Insulation Material	Cyclopentane	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated	Ventilated
Defrosting	Automatic	Automatic	Automatic
Interior Dimensions (WDH)	18.9" x 18.3" x 46" 480 x 465 x 1168 mm	22.8" x 19.8" x 55" 579 x 503 x 1397 mm	25.2" x 28.3" x 62.3" 640 x 719 x 1582 mm
Net Weight	161 lb (73 kg)	220 lbs (99.8 kg)	320 lbs (145.2 kg)
Net Dimensions (WDH)	21.7" x 21.7" x 63" 551 x 551 x 1600 mm	25.6" x 22.8" x 79.4" 650 x 579 x 2017 mm	28.3" x 31.9" x 83.6" 719 x 810 x 2123 mm
Gross Weight	225 lb (102 kg)	270 lbs (122 kg)	355 lbs (161 kg)
Gross Dimensions (WDH)	24" x 25" x 69" 599 x 630 x 1755 mm	48" x 40" x 90" 1219 x 1016 x 2286 mm	48" x 40" x 90" 1219 x 1016 x 2286 mm
Plug Type	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P

*\* This equipment is intended for indoor environment using where ambient temperature do not exceed 26°C(80°F) & 55% relative humidity*


## TECHNICAL SPECIFICATION (Multi Door Models)

Features	53" wide/ 45 cu. ft.	53" wide/ 45 cu. ft.	78" wide / 53 cu. ft.
Item	50032	52032	50052
Model	RE-CN-0045-HC	RE-CN-0045-HC-SW	RE-CN-0052-HC
Capacity	45 cu. ft. (1274 L)	45 cu. ft. (1274 L)	53 cu. ft. (1500 L)
Number of Doors	2 Sliding Glass Doors	2 Swing Glass Doors	3 Swing Glass Doors
Self-Closing Door	Yes	Yes	Yes
Material	Exterior: Painted Steel	Exterior: Painted Steel	Interior & Exterior: Stainless steel with aluminum back
Number of Shelves	8	8	12
Shelf Capacity	90 lb (41 kg)	90 lb (41 kg)	90 lb (41 kg)
Shelf Material	Plastic Coated	Plastic Coated	Plastic Coated
Number of Casters	4	4	6
Power	1/4 HP	1/4 HP	3/4 HP
Current	4.3A	4.3A	10.7 A
Electrical	110-120V / 60Hz / 1Ph	110-120V / 60Hz / 1Ph	110-120V / 60Hz / 1Ph
Temperature Controller	Digital	Digital	Digital
Temperature Range	0.5°C - 5°C (33°F - 41°F)	0.5°C - 5°C (33°F - 41°F)	0.5°C - 5°C (33°F - 41°F)
Refrigerant	R290	R290	R290
Insulation Material	Cyclopentane	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated	Ventilated
Defrosting	Automatic	Automatic	Automatic
Interior Dimensions (WDH)	50"x 28.3" x 62" 1351 x 807 x 2133 mm	50"x 28.3" x 62" 1351 x 807 x 2133 mm	73.7" x 25.6" x 55.7" 1872 x 650 x 1415 mm
Net Weight	441 lb (200 kg)	441 lb (200 kg)	615 lbs (279 kg)
Net Dimensions (WDH)	53.2" x 31.8" x 84" 1351 x 807 x 2133 mm	53.2" x 31.8" x 84" 1351 x 807 x 2133 mm	78.3" x 29.9" x 84.6" 1988 x 759 x 2150 mm
Gross Weight	481 lb (218 kg)	481 lb (218 kg)	720 lb (326 kg)
Gross Dimensions (WDH)	56" x 34" x 85" 1422 x 850 x 2148 mm	56" x 34" x 85" 1422 x 850 x 2148 mm	84" x 36" x 86" 2133 x 914 x 2184 mm
Plug Type	NEMA 5-15P	NEMA 5-15P	NEMA 5-20P


\* This equipment is intended for indoor environment using where ambient temperature do not exceed 26°C(80°F) & 55% relative humidity

## TECHNICAL DRAWING


22" Wide-50033

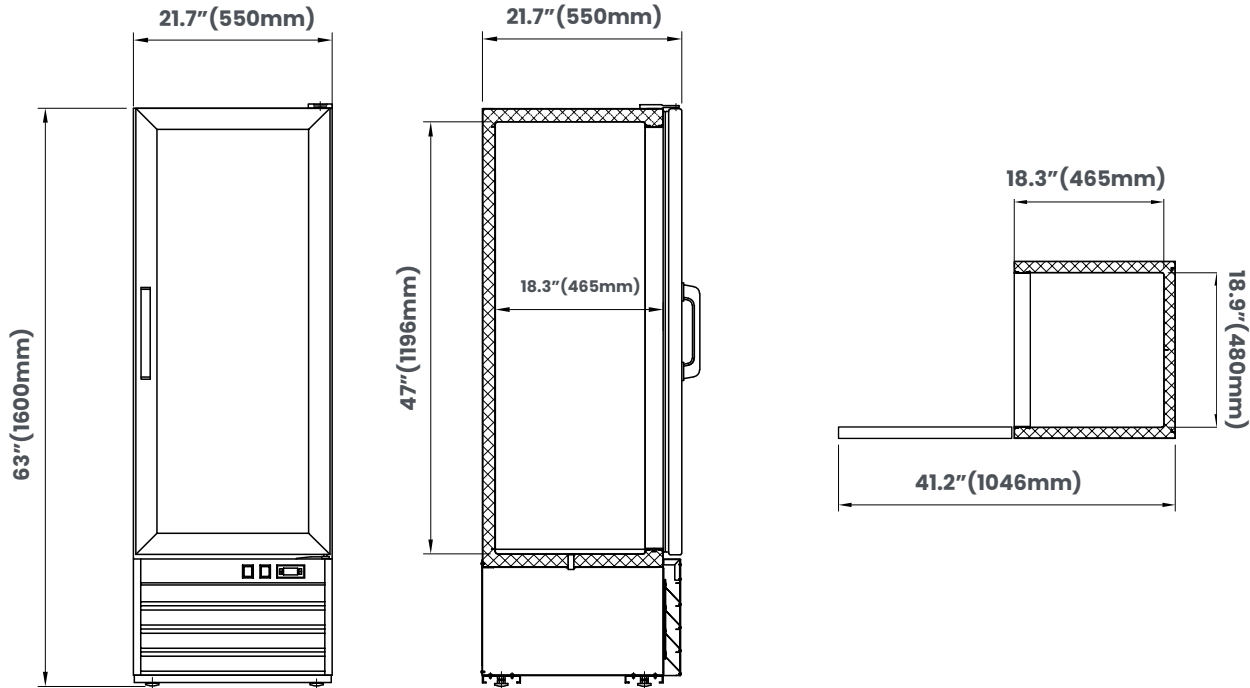


26" Wide-50035

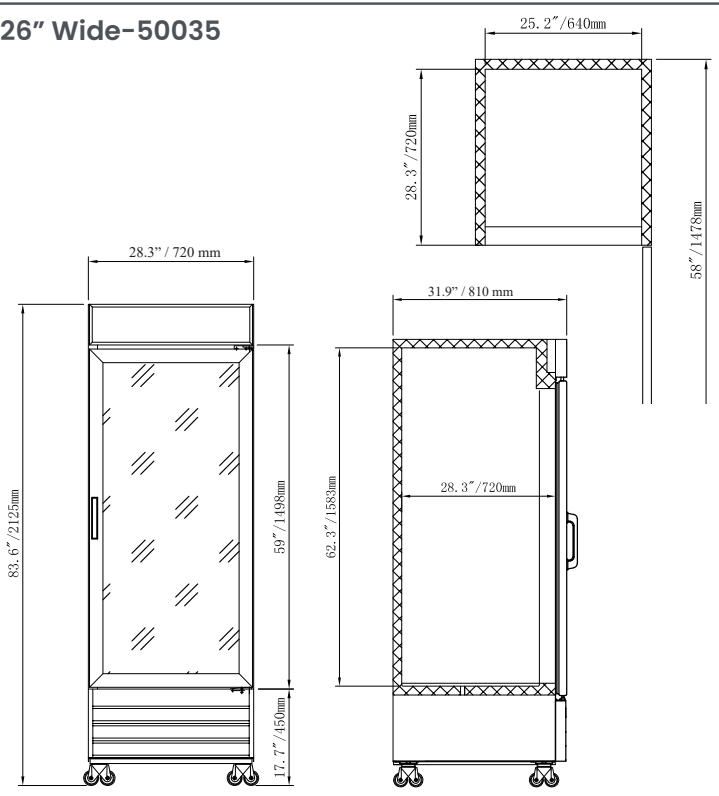

28" Wide- 50036

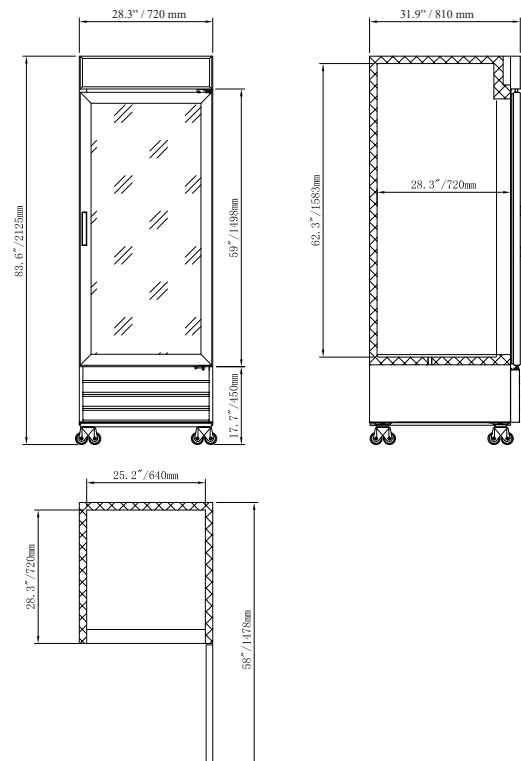

## 54" Wide- 50032 & 52032

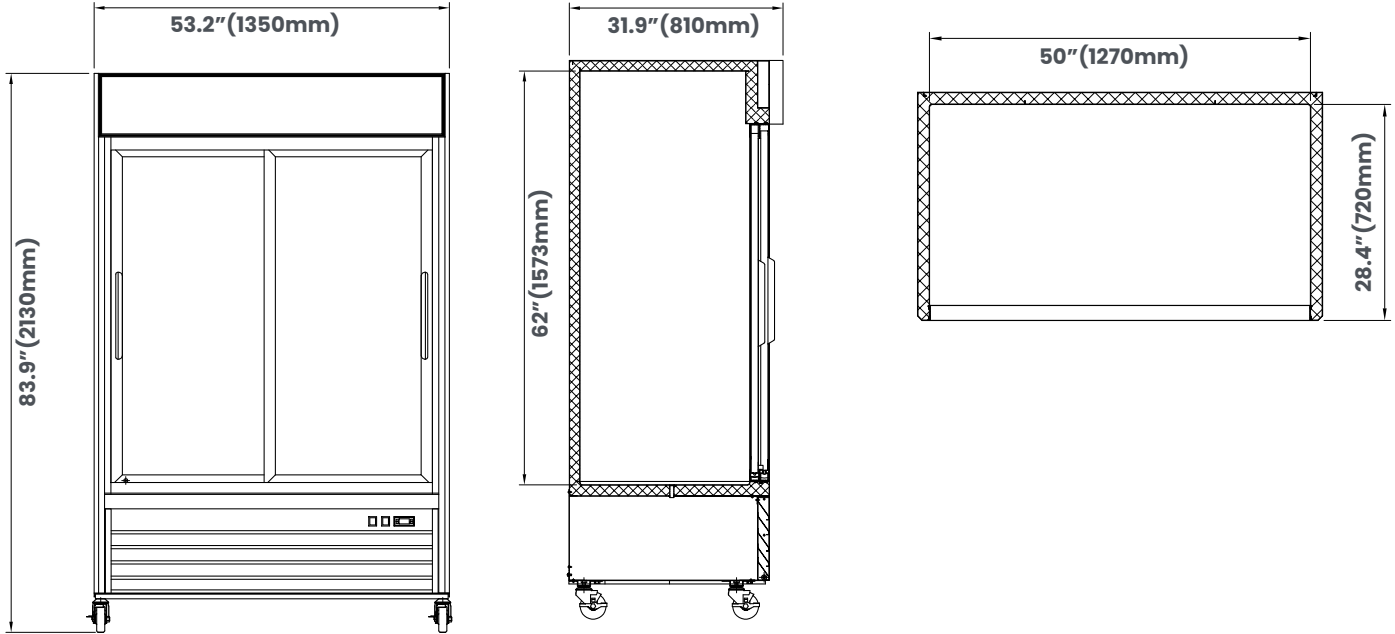

## 78" Wide- 50052

