

# STAINLESS STEEL BAND SEALER

MODEL FR-770

sealersales



## Popular Entry Level Unit

- Easy to operate with fast warm up
- Durable stainless steel construction
- Feeds left to right
- Optional vertical configuration available
- Recommended for materials such as polyethylene, polypropylene, laminated foil

Our **FR-770 Stainless Steel Band Sealer** seals all types of thermoplastic materials and bags with ease! Designed for industries like food, medical, and cosmetics, this powerhouse delivers high-speed sealing at 20-30 6" bags per minute. Want to add a custom touch? The optional embossing wheel lets you imprint messages directly on the seal line.

Easy to use with minimal training, the FR-770 features a fast warm-up time and a solid-state digital temperature controller for consistent seal quality. The adjustable conveyor and motorized rubber belt ensure smooth operation, while knurled pressure rolls provide variable pressure control. An optional vertical configuration unit is available to seal stand up pouches or bags with liquids.

Spare parts kit include PC Board, PTFE belt, drive belts, and typesets, with additional typesets and parts available for purchase.



### SPECIFICATIONS

POWER	110V / 60HZ	BAG HEIGHT (VERTICAL)	7-7/8" - 12"
MOTOR / SEALING POWER	50W / 300W*2	TYPESET SIZE	3 X 4 X 9MM
SEALING SPEED	0-630 INCHES/MINUTE	TYPESETS/LINE	15/LINE X 3
SEAL WIDTH	1/2" (10MM)	DIMENSIONS (H)	33" X 17" X 13"
CONVEYOR SIZE	38" X 7"	DIMENSIONS (V)	33" X 17" X 26"
CONVEYOR LOAD	< 22-LBS	WEIGHT	63-LBS

# STAINLESS STEEL BAND SEALER

MODEL FR-770

sealersales

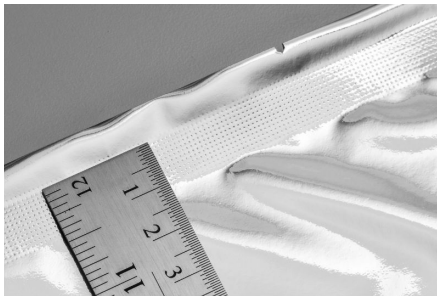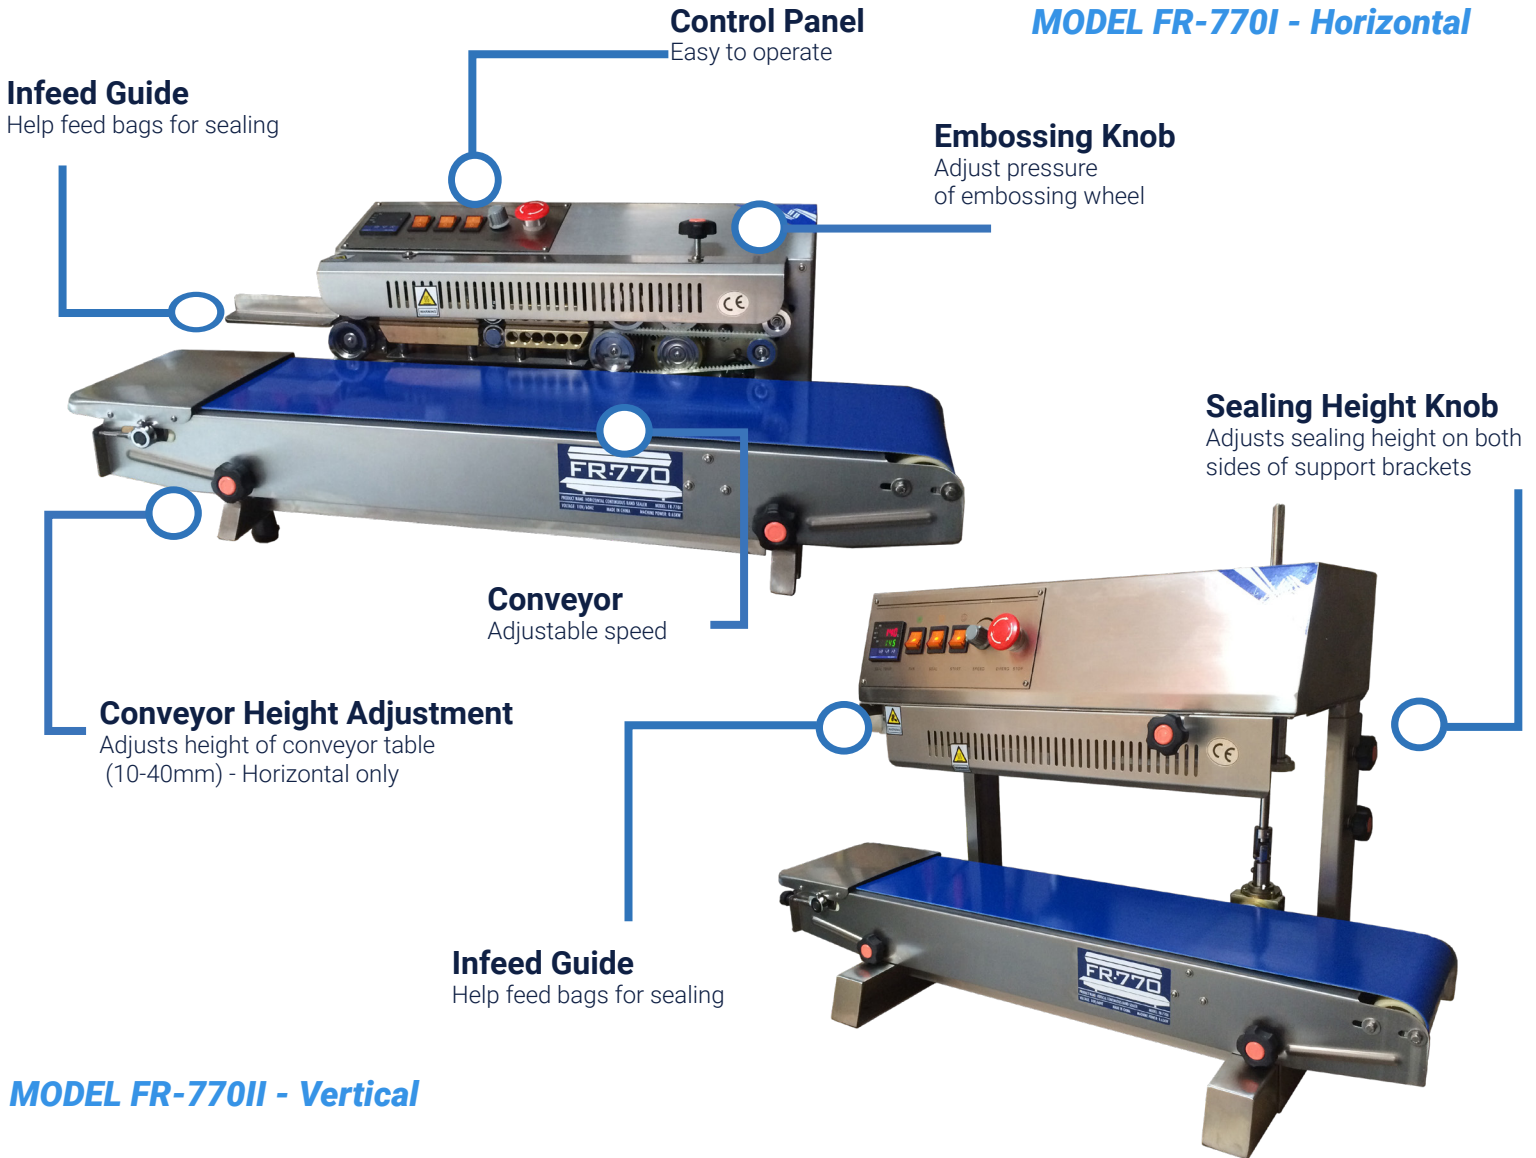

Seal Example



Included Manufacturers' Kit

## ADDITIONAL OPTIONS

- Serrated or smooth seal
- Counter
- Printing (HL-M810)
- Right to Left Feed (CBS-880)
- Stainless Steel Stand
- Seal Widths: 15mm / 30mm
- 220V Voltage